

AceScope

Video Laryngoscope

Lightweight & Ergonomic design

Wireless Charging


Picture & Video

Touch Screen

 ACE MEDICAL



AceScope Video Laryngoscope

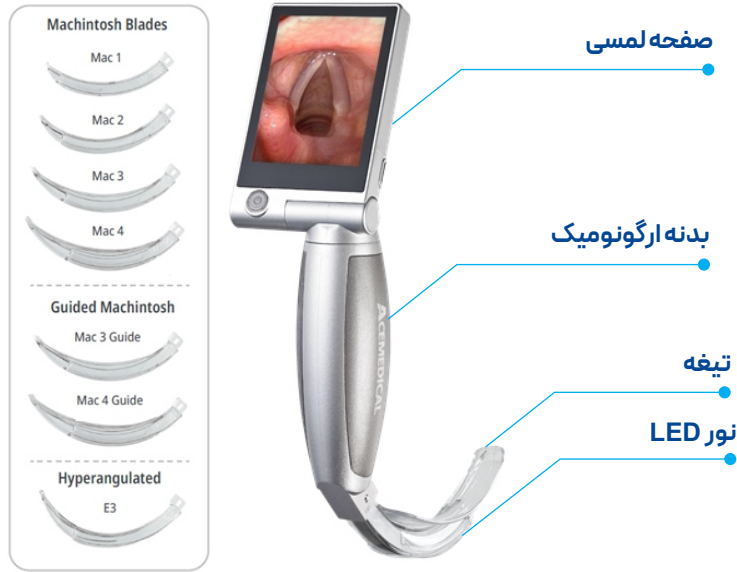

Photo

Take a picture with a one-finger single touch.



Video

Start or finish recording a video with a two-finger single touch.



Album & Setting

Access saved files or device settings with a three-finger single touch




Zoom

Zoom the screen with a single touch on the bottom of the display

Portable with wireless charging battery

- مدت زمان استفاده از دستگاه ۲۴۰ دقیقه
- مدت زمان لازم جهت شارژ کامل ۱۸۰ دقیقه

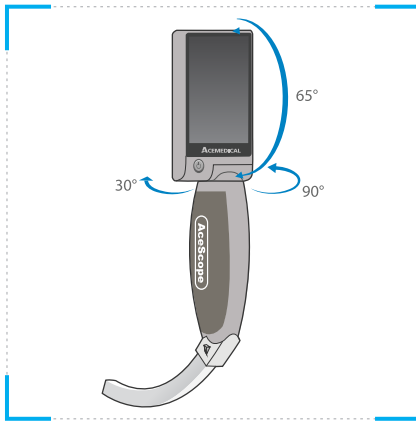


Tilt & Rotate

Tilt: 65 degree

Rotate: right 90 degree / left 30 degree

Energy Saving Auto-sleep & Shut down


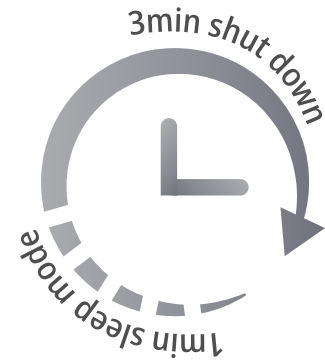


Specifications


Resolution	640 x 480
Angle of tilt and rotate	diagonal 71.9 ±15%
Light	High Intensity LED
Storage / port type	32G / USB-C
Display Size	2.8 inches
Alarm	Color Changes on LED Power Button
Operating Time	Up to 240 min.
Wireless Charging Time	Up to 180 min.
Touch Screen Feature	Multi-touch fuction

ILLUCO HEADLIGHT

BEAM UNIFORMITY & QUALITY Beyond Quality

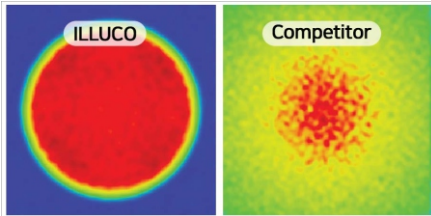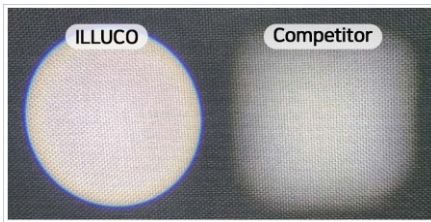

COLOR TEMPERATURE

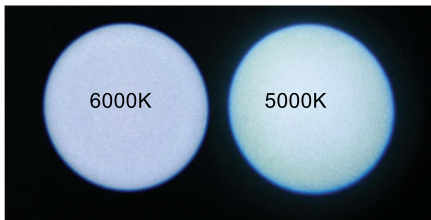

Wireless Headlight : IHL2000

- ✓ حرکت آزادانه پزشک به هنگام استفاده از هدلایت به دلیل عدم وجود کابل و سیم
- ✓ سبک ترین هدلایت جهان با وزن کل ۳۷ گرم با باتری
- ✓ دارای نور همگن
- ✓ سنسور لمسی روشن - خاموش
- ✓ سنسور لمسی کنترل روشنایی ۳ مرحله ای
- ✓ شارژ سریع USB TYPE C
- ✓ سازگار با تمام آداپتورهای برندهای دیگر
- ✓ نشانگر LED شارژ باتری به رنگ های سبز، زرد و قرمز
- ✓ قابلیت استفاده با هد بند و لوپ
- ✓ آلامر اتصال و انفصال باتری
- ✓ حد اکثر ۶۵۰۰۰ لوکس و حداقل ۳۵۰۰۰ لوکس
- ✓ CRI شاخص تشخیص نور بالاتر از ۹۶%
- ✓ دارای باتری Backup
- ✓ دارای فیلتر نور - UV عدم پخش نور
- ✓ زمان شارژ باتری : ۲ ساعت
- ✓ زمان کارکرد هر باتری : ۳ ساعت



Wired headlight – IHL-1000

- ✓ حرکت آزادانه پزشك به هنگام استفاده از هدلايت به دليل عدم وجود كابل و سيم
- ✓ عدم پخش نور
- ✓ زمان شارژ باتري : ۳ ساعت
- ✓ يكنواخت، نقطه گرد روشن در طول زمان اجرا
- ✓ حداكثر ۸۵۰۰۰ لوکس و حداقل ۴۵۰۰۰ لوکس
- ✓ شارژر سريع Type C
- ✓ داراي نور UV
- ✓ زمان کارکرد هر باتري : ۷ تا ۲۴ ساعت
- ✓ شاخص تشخیص نور بالاتر از ۹۶%
- ✓ داراي نور همگن
- ✓ تعویض سريع باتري



Accessories Included

1. BATTERY PACK
2. LIGHT SOURCE
3. EXTENSION CABLE
4. CHARGING CABLE
5. SCREWDRIVER
6. ATTACHMENTS
7. CLEANING CLOTH



ILLUCO LOUPES



- 1) Angled/Ergonomic
- 2) Galilean/Prismatic
- 3) Flip-up



RedDot Winner 2022
Medical devices and technology




IDEA Award Featured Finalist

IAL Series TTL ANGLED LOUPES

Allows the user to work in a more ergonomic posture, with a comfortable view

- 28% wider FOV & deeper DOF than top competitors
- Maintains forward gaze while simultaneously reducing eye fatigue and strain on the neck/back
- Increase comfortable wear time by improving posture
- Outstanding lightweight modern design
- Recommended for long-term use
- Adjustable focal point/working distance

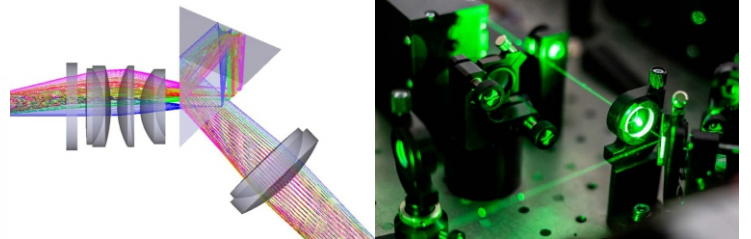

Model	Type	Magnification	Galilean or Prismatic	FOV (Cm, @45 Cm)	DOF (Cm)	Working Distance (Cm)	Resolution (lp/mm)	Weight (g) without Frame
IAL-1040A	Angled	4.0 x	PM	9	10	40-65	30	42.00

ITL Series TTL LOUPES



Model	Type	Magnification	FOV (Cm)	DOF (Cm)	Working Distance (Cm)	Resolution (lp/mm)	Weight (g) without Frame
ITL-1025G	TTL Galilean	2.5x	15	20	35-55	12	15
ITL-1030G	TTL Galilean	3.0x	12	15	35-55	13	44
ITL-1035G	TTL Galilean	3.5x	9.5	15	35-55	16	46
ITL-1040P	TTL Prismatic	4.0x	8.5	7	35-65	12	43
ITL-1045P	TTL Prismatic	4.5x	7.5	6	35-65	13	48
ITL-1055P	TTL Prismatic	5.5x	6	3.5	35-65	14	56
ITL-1065P	TTL Prismatic	6.5x	5	3.5	35-65	16	60

Ultra View IFL Series FLIP-UP LOUPES



Model	Type	Magnification	Adjustable Pupil Distance (mm)	FOV (Cm)	DOF (Cm)	Working Distance (Cm)	Resolution (lp/mm)	Weight (g) without Frame
IFL-1030G	Flip-up Galilean	3.0 x	54-76	11	15	37 / 42 / 47	13	48

ILLUCO MIRROR



1X

2X

3X

مشخصات

محصول

سطح جلویی دارای پوشش دی الکتریک	نوع سطح آینه
آبی پررنگ - آبی کمرنگ	رنگ
بیش از ۹۹٪ انعکاس طبیعی	بازتابش
شیشه اپتیکی	جنس آینه
پوشش ضد آب، مقاوم در برابر مه و بخار	ضد آب بودن
سایز 4 / Ø 22 mm	سایز آینه
1x, 2x, 3x	گزینه های بزرگنمایی
قابل اتو کلاو	قابلیت استریلیزه کردن
۵ دقیقه در 273°F (134°C) ۲۰ دقیقه در 250°F (121°C) جهت جلوگیری از آسیب، نباید دمای آن بیش از 277°F (136°C) شود	دستور العمل استریلیزه

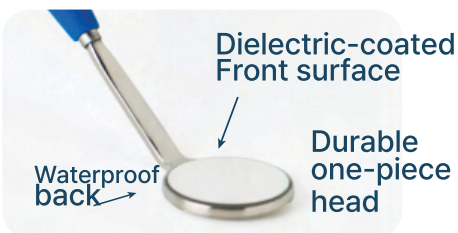


PHOTO MIRROR



FULL-SURFACE COATING

DOUBLE-SIDED


ANTI-FOG

AUTOCCLAVE-RESISTANT

99% REFLECTIVITY


1

Occlusal, Large




2

Occlusal, Medium



3

Occlusal, Small




4

Lingual, Medium



5

Buccal, Medium

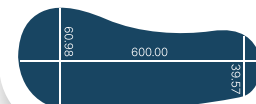

Dermoscopy with IDS SERIES

- IDS-9100
- IDS-1100
- IDS-1100C
- IDS-3100 (Wood's lamp)
- IDS-1000 PLUS



	IDS-3100 (Wood's lamp)	IDS-1000 PLUS	IDS-1100	IDS-1100C	IDS-9100
Polarization	Cross & Parallel UV	Cross & Parallel	Cross & Parallel	Cross & Parallel	Cross & Parallel UV
Magnification	2.5X	10X	10X	10X	12X
Field of view	100mm	18mm	22mm	22mm	20mm
Brightness level	3	X	3	3	4
LED	4 White LEDs 6 UV LEDs	8 White LEDs	32 White LEDs	32 White LEDs	16 White LEDs 4 UV LEDs
Battery	Lithium-ion 3400mAh 3.7V	Disposble Lithium 6V 2CR5	Lithium-ion 1150mAh 3.7V	Lithium-ion 1150mAh 3.7V	lithium-ion 3,500mAh 3.6V
Charging method	Charging cradle / USB 5 pin	X	USB-C	Charging cradle / USB magnet	Charging cradle / USB-C
Camera & Smartphone compatibility	X	○	○	○	○




ADVANTAGE



VITILIGO



SEBUM

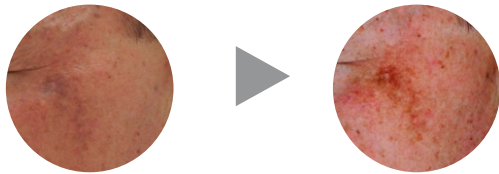

PIGMENTED LESIONS

UV 395, 405NM (WOOD'S LAMP)

Examination of pigmented & hypo-pigmented skin lesions including melisma and vitiligo. Also useful for determining the location of the melanin pigment (epidermis or dermis). Detection of cutaneous fungal, bacterial infection, acne, skin inflammation and etc. Photodynamic diagnosis (PDD) of skin cancers using fluorescence.

POLARIZED LIGHT

Diagnosis of actinic keratosis, non-melanoma skin cancers, and melanoma by reducing the reflection of the skin surface.

NON-POLARIZED LIGHT

Examine skin surface by 2.5 magnification.

OPTION



8mm Small contact plate_ 1100

Observation for narrow or hard to reach areas.

- Rod lens diameter : 8mm
- Rod height : 9mm



COMPACT UNIVERSAL CLAMP

Portable universal adapter that can be used for mobile phone and tablet



BELT CLIP LEATHER POUCH

Genuine leather pouch black / red



MIRRORLESS CAMERA ADAPTER

Canon, Sony and Nikon models are available



SLEEVE WITH LANYARD

Protect your IDS-Series and carry easily with the sleeve





Micare Medical LED Medical Headlights



WE MAKE A DIFFERENCE !



Warm white light: comparable with conventional lamps as bulbs or gas discharged lamps to ensure usual optimum illumination during examination. Spectral composition of the light similar to bulbs, gas discharged lamps.



Cold white light And Warm Yellow light for more detailed and improved contrast images, particularly in the red spectrum. Spectral composition of the light allows a more detailed view of the vessels and areas with strong blood circulation due to enhanced absorption.



Illumination: LED-Ring. This technology makes the use of fibre optics unnecessary with nevertheless optimum illumination in the area of application. Field of vision is not restricted. All advantages of a single LED are fulfilled.



The surface of the instrument is coated with a special coating powder. The regular cleaning effort is reduced significantly and the high-quality appearance is retained for the long term



Light spot can be adjusted from a diameter of 2 cm up to 12 cm at an operating distance of 30 cm.



Illumination: LED bulb. Reduced energy consumption as well as a higher shock resistance ensure a significantly longer service life of approx. 50,000 - 100,000 hours. LEDs can be sterilized and are environmentally friendly.

JD2500 10W LED Headlight

Light source	LED refractive technology
Light Intensity (MAX)	Up To 85,000LUX
Color temperature	4,500 - 5,500K
Illumination spot size (D = Φ200MM)	Adjustable From 12-70MM
Illumination Spot size (D = Φ300MM)	Adjustable From 18-102MM
Illumination Spot size (D = Φ500MM)	Adjustable From 35-180MM
Headlight housing	Aluminum
Headlight weight	403g (With 1pc Battery)
Headband material	ABS ratchet adjustability; antimicrobial protection on pads
LED Bulb Life Time	50,000hrs +
Battery type	Rechargeable lthium-ion (charger included)
Battery Life	5-12HRS
Battery charge time	0% life: 4 hours 50% life: 2 hours
Standard Packing	1pc Battery + 1pc USB Charger + 1pc Aluminum Box
Color Rendering Index	> 93
Magnification Glasses Optional	2.5X, 3.0X, 3.5X, 4.0X, 5.0X , 6.0X




JD2600 5W LED Headlight

Light source	LED refractive technology
Light Intensity (MAX)	
Color temperature	4,300 - 4,800K
Illumination spot size (D = Φ200MM)	Adjustable From 10-78MM
Illumination Spot size (D = Φ300MM)	Adjustable From 18-102MM
Illumination Spot size (D = Φ500MM)	Adjustable From 35-180MM
Headlight housing	Aluminum
Headlight weight	403g (With 1pc Battery)
Headband material	ABS ratchet adjustability; antimicrobial protection on pads
LED Bulb Life Time	50,000hrs +
Battery type	Rechargeable lthium-ion (charger included)
Battery Life	5-12HRS
Battery charge time	0% life: 4 hours 50% life: 2 hours
Standard Packing	2pcs Battery + 1pc USB Charger + 1pc Aluminum Box
Color Rendering Index	> 93
Magnification Glasses Optional	2.5X, 3.0X, 3.5X, 4.0X, 5.0X , 6.0X



Warm

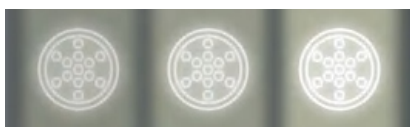

Low intensity Medium intensity High intensity





MEDICAL LOUPES



Series No.	Magnification	Working distance	Field of view	Depth of Field	Weight with frame
21BPM-250X	2.5x	300-580mm	150-170mm	200mm	44g
21BPM-300X	3.0x	300-580mm	130-150mm	200mm	46g
21BPM-350X	3.5x	300-580mm	110-130mm	200mm	50g

Series No.	Magnification	Working distance	Field of view	Depth of Field	Weight with frame
21APS-250X	2.5x	300-580mm	150-170mm	200mm	50g
21APS-300X	3.0x	300-580mm	130-150mm	200mm	55g
21APS-350X	3.5x	300-580mm	110-130mm	200mm	60g



Series No.	Magnification	Working distance	Field of view	Depth of Field	Weight with frame
24NM-250X	2.5x	300-580mm	150-170mm	200mm	38g
24NM-300X	3.0x	300-580mm	130-150mm	200mm	40g
24NM-350X	3.5x	300-580mm	110-130mm	200mm	43g

Series No.	Magnification	Working distance	Field of view	Depth of Field	Weight with frame
22NS-250X	2.5x	300-550mm	80-120mm	200mm	40g
22NS-300X	3.0x	300-550mm	70-100mm	200mm	45g
22NS-350X	3.5x	300-550mm	60-100mm	200mm	50g



Series No.	Magnification	Working distance	Field of view	Depth of Field	Weight with frame
PKHM-500X-S	5.0x	280-380mm	55mm	80mm	79g
PKHM-500X-M	5.0x	360-460mm	60mm	80mm	79g
PKHM-500X-L	5.0x	440-540mm	65mm	80mm	79g
PKHM-500X-XL	5.0x	500-600mm	70mm	80mm	79g

Series No.	Magnification	Working distance	Field of view	Depth of Field	Weight with frame
PKHM-400X-S	4.0x	280-380mm	60mm	80mm	75g
PKHM-400X-M	4.0x	360-460mm	65mm	80mm	75g
PKHM-400X-L	4.0x	440-540mm	70mm	80mm	75g
PKHM-400X-XL	4.0x	500-600mm	75mm	80mm	75g



Resolution



GP



ENT



PEDIATRIC



TELEMEDICINE

Sync Vision

iO1 Elite

Digital Otoscope

Safe COVID distance between doctors and patients.



3.9mm probe

Type-C USB cable

Full Screen
Clear and unblocked view

Compatible with mainstream specula for both adult and children

Type-C USB cable

Dual-purpose pedestal



Clinics



Visits



Emergency



Audiology

SyncVision Technology Corp.

3F., No.88, Xingde Rd., Sanzhong Dist., New Taipei City 24158, Taiwan
Tel: +886-2-2278-2222 Fax: +886-2-2278-1111
E-mail: Info@sync-vision.com Website: www.Sync-Vision.com

Technical features and Specifications

Dimensions	43x40x175mm	File Format	JPEG, MP4
Weight	Approximate 140g	Interface	USB Type C
Display	1.5 full color TFT-LCD	Memory	Micro SD card 32G
Probe Size	Ø3.9mmx 43mm(L)	WIFI standard	802.11
Resolution	Full HD resolution	Power	Built-in rechargeable lithium battery
Focus Type	Fixed focus		3.7V/ 2600mAh / (6 hours runtime)
Light Source	High Luminance White LED		

FDA CE
ISO QMS
CERTIFIED 13485

Sync Vision



GP



ENT



PEDIATRIC



TELEMEDICINE



Wi-Fi




FULL HD

Resolution



Confirmed by ITRI that can reduce shoulder, and hand fatigue.


Full screen with built-in LCD.

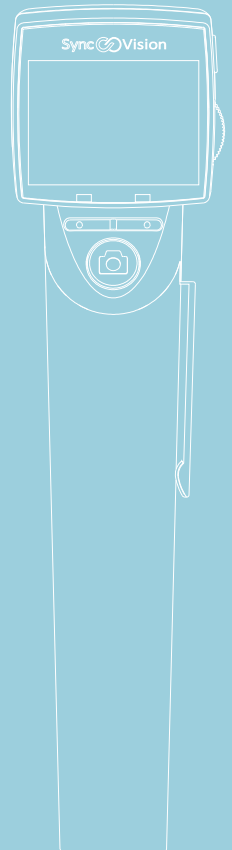

iO1 Elite

Digital Otoscope

Laptop & Pad compatible

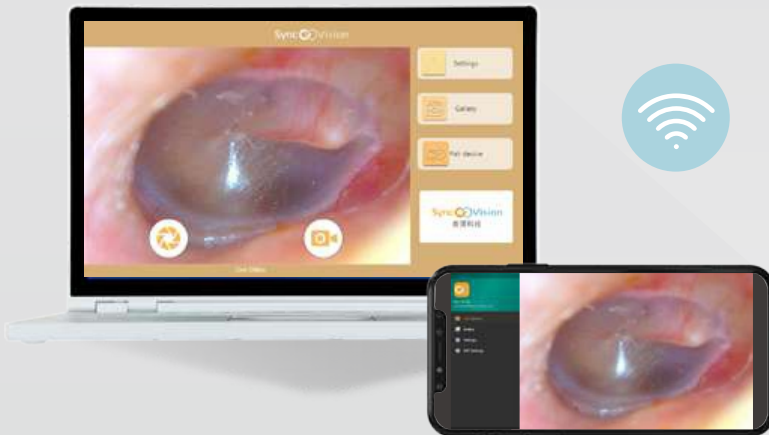

Telemedicine

Full HD

User friendly




Comes with WiFi live video streaming capability, the iO1 Elite is a handy solution for patient communication.

FDA



ISO CERTIFIED 13485

QMS

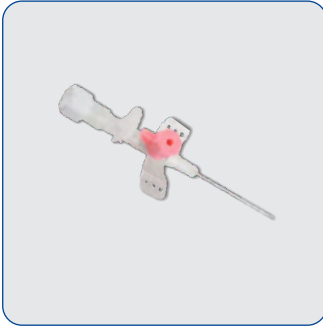

Range of IV Cannula

Prima-Flo / Primaflon / IV Flon / Canatech/ Novocath /

Primaflo Pro : With wings & with port

Primacath : IV Cannula with integrated 3 way stopcock

Izzy : With Crowncap & Small Wings & Without Port

Prima Neo / Prima Neo Alpha / Primacan :

With Small Wings & Without Port

Primapen : Pen type IV Cannula

Primacan Alpha : Without Wings & Without Port

Primasafe : With Safety Features

Size available : Refer Table 1

OUR TECHNOLOGIES



CATHETER MATERIAL

PTFE | FEP | PU

SPECIFICATIONS

14 : Orange 16 : Gray 17 : White 18 : Green
20 : Pink 22 : Blue 24 : Yellow 26 : Violet

Range of Infusion Sets

- Drippy V** : Vented IV Set, 20 drops / ml
- Drippy NV** : Non vented IV Set, 20 drops / ml
- Drippy Micro V** : Vented Micro IV Set, 60 drops / ml for pediatric use
- Drippy Micro NV** : Non Vented Micro IV Set, 60 drops / ml for pediatric use
- Onco Guard** : Non DEHP, with 0.2 micron filter, Y injection site & luer lock

Drippy Ultra & Drippy Ultra Micro:
Premium IV Set with special feature



Link Range of 3 Way Stop Cock With & Without Extension

- Link** : 3 ways stop cock
- Link LR** : Lipid resistant 3 way stop cock

- Link 3 KLR** : With Click feel at every 45°
- Link 3XT** : 3 way stop cock with extension tubes (5cm-250 cm)



Range of Needle Free Connectors

Needle Free Connector

Solo Connect

Uni Connect - Extension Tube with one needle free site

Bi connect - Extension Tube with two needle free site

Tri connect - Extension tube with three needle free site



Macro Bore Tubing also available